


Drip Edge Flashing

Stainless Steel
FS1010

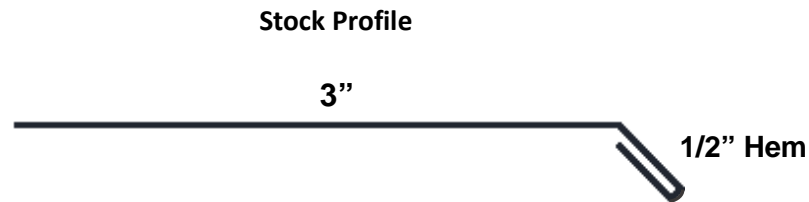

Hemmed Drip Edge

(use in conjunction with membrane or laminated flashings)

Product Information:

Uses:

- Thru-Wall Flashing exposed drip edge*

Dimension:

- 28 gauge (.0156) x standard 10'-0" lengths

Finish:

- Stainless Steel – Type 304 / 2D Finish
ASTM A240/A240M, ASTM A666, ASTM A480/A480M and ASTM A167

Advantages:

- Durability, not prone to tears or punctures
- Very long life
- Hemmed drip edges deflect downward migrating water away from the building
- Hemmed drip edges form safe, clean aesthetically attractive lines
- Separate hemmed drip edge piece can supplement the performance of membrane and laminated copper flashing

Note: Seam minimum 4" laps with two beads of Lap Rite™ non-skinning butyl metal flashing sealant.

*Exposed metals not recommended for use at base of wall details.

For technical assistance call us toll free at 1-800-659-4731.

