


## PRODUCT DESCRIPTION

DURA♦SKRIM® 2FR and 10FR consist of two sheets of high-strength fire-retardant virgin film laminated together with a third layer of molten polyethylene. A heavy-duty scrim reinforcement placed between these plies greatly enhances tear resistance and increases service life. DURA♦SKRIM's fire-retardant films meet or exceed NFPA's 701 test, method 2 (Large Scale Requirements).

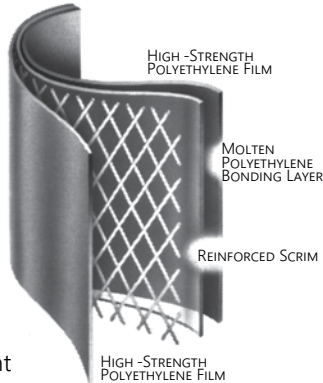

## PRODUCT USE

DURA♦SKRIM® 2FR and 10FR are used in applications that require a fire-retardant material, and demand high puncture and tear strengths.

## SIZE & PACKAGING

DURA♦SKRIM® 2FR and 10FR stock sizes are 6 and 20 feet wide by 100 feet long; they are also available in a variety of custom widths with minimum order quantities.



Building Abatement Enclosure

## PRODUCT

## PART #

DURA♦SKRIM 2FR..... R5CCF

DURA♦SKRIM 10FR..... R10CCF

## APPLICATIONS

- |                         |                    |
|-------------------------|--------------------|
| Construction Enclosures | Temporary Walls    |
| Asbestos Abatements     | Curtains           |
| Fumigation Covers       | Job Site Coverings |

# DURA♦SKRIM®

MASONPRO, Inc.  
43300 Seven Mile Road  
Northville, MI 48167  
1-800-659-4731  
www.masonpro.com

# DURA♦SKRIM® 2FR & 10FR

FIRE RETARDANT FOUR-LAYER REINFORCED LAMINATE

PROPERTIES	TEST METHOD	DURA♦SKRIM 2FR		DURA♦SKRIM 10FR	
		IMPERIAL	METRIC	IMPERIAL	METRIC
APPEARANCE		Translucent, White Color		Translucent, White Color	
THICKNESS, NOMINAL		6 mil	0.15 mm	10 mil	0.25 mm
WEIGHT		18.5 lbs/MSF 2.7 oz./yd <sup>2</sup>	90 g/m <sup>2</sup>	40.5 lbs/MSF 5.8 oz./yd <sup>2</sup>	198 g/m <sup>2</sup>
CONSTRUCTION		Extrusion laminated with scrim reinforcement			
<sup>2</sup> 1" TENSILE STRENGTH	ASTM D7003	45 lbf/in	79 N/cm	57 lbf/in	100 N/cm
<sup>2</sup> ELONGATION AT FILM BREAK	ASTM D7003	400 %	400 %	500 %	500 %
<sup>2</sup> GRAB TENSILE	ASTM D7004	55 lbf	245 N	75 lbf	334 N
<sup>1</sup> TRAPEZOID TEAR	ASTM D4533	30 lbf	133 N	44 lbf	196 N
MULLEN BURST	ASTM D751	38 psi	262 kPa	75 psi	517 kPa
MAXIMUM STATIC USE TEMPERATURE		180° F	82° C	180° F	82° C
MINIMUM STATIC USE TEMPERATURE		-70° F	-57° C	-70° F	-57° C
WVTR	ASTM E96 Procedure B	0.587 grains/(100in <sup>2</sup> -day)	0.590 g/(m <sup>2</sup> -day)	0.214 grains/(100in <sup>2</sup> -day)	0.202 g/(m <sup>2</sup> -day)
PERM RATING	ASTM E96 Procedure B	0.086 Perms grains/(ft <sup>2</sup> -hr-in Hg)	0.057 Perms g/(24hr-m <sup>2</sup> -mm Hg)	0.031 Perms grains/(ft <sup>2</sup> -hr-in Hg)	0.021 Perms g/(24hr-m <sup>2</sup> -mm Hg)
BURNING CHARACTERISTICS FLAME SPREAD INDEX SMOKED DEVELOPED VALUE	ASTM E84 Procedure A	5 20		5 55	

<sup>1</sup> Tests are an average of diagonal directions.

<sup>2</sup> Tests are an average of primary reinforcement directions.

MEETS OR EXCEEDS THE FOLLOWING FIRE TESTING:

1. National Fire Protection Association (NFPA) 701, Test Method 2 (Large Scale)
2. Class "A" Wall & Ceiling Finish Category as given in the National Fire Protection Association Life Safety Code 101, "Interior Wall and Ceiling Finish Classification" (ASTM E-84-97a).

## DURA♦SKRIM®

DURA♦SKRIM® 2FR & 10FR are fire-retardant four-layer reinforced extrusion laminates. The outer layers consist of a high quality polyethylene film with a high concentration of fire-retardant additives. DURA♦SKRIM® 2FR & 10FR are reinforced with a heavy duty scrim laid in a diagonal pattern spaced 3/8" apart with an additional machine direction scrim every 9" (R5CCF) and 3" (R10CCF) across the width. The individual plies are laminated together with molten polyethylene. DURA♦SKRIM® 2FR & 10FR are designed to meet the stringent requirements of the Boston Fire Department for Temporary Enclosures.



Scan QR Code to  
download technical  
data sheets.

Note: To the best of our knowledge, unless otherwise stated, these are typical property values and are intended as guides only, not as specification limits. Chemical resistance, odor transmission, longevity as well as other performance criteria is not implied or given and actual testing must be performed for applicability in specific applications and/or conditions. RAVEN INDUSTRIES MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage. Limited Warranty available at [www.RavenEFD.com](http://www.RavenEFD.com)

**RAVEN ENGINEERED FILMS**  
P.O. Box 5107 Sioux Falls, SD 57117-5107  
Ph: +1 (605) 335-0174 • TF: +1 (800) 635-3456

© 2018 RAVEN INDUSTRIES INC. All rights reserved.



082218 EFD 1075