



PRODUCT SUBMITTAL

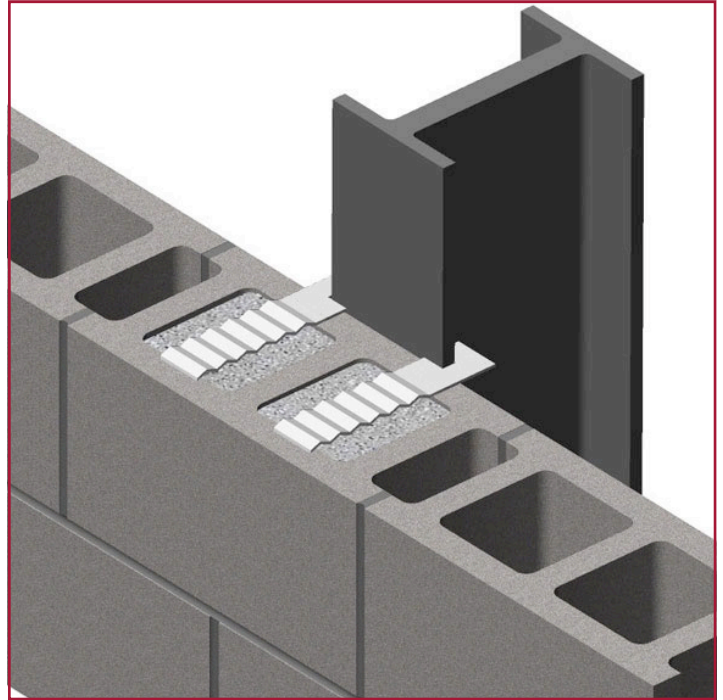

WIRE-BOND[®]

2800 Notched Column Anchor - Corrugated

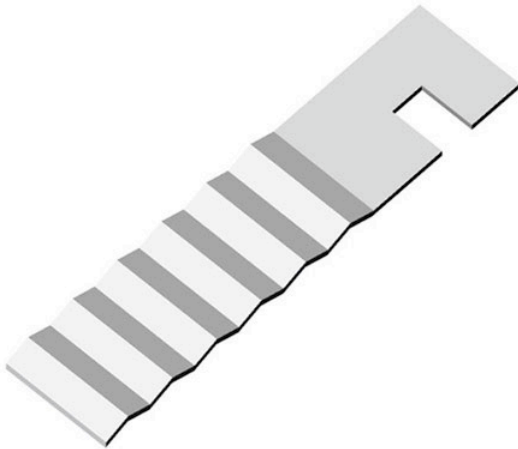

MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M

Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft)

Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)



Recycled Content:

Mill Galvanized & Hot Dip,
82.8 % Post-Consumer
17 % Post Industrial / Pre
- Consumer

Stainless Steel,
60% Post Consumer
V O C Content - 0%

SIZES / FINISHES

STANDARD DIMENSIONS :

12 Gauge thick x 2" wide x 7" long

FLANGE SLOT:

5/8" wide x 1" deep located 1" from end

Custom sizes available upon request.

FINISH:

Mill Galvanized
Hot Dip Galvanized
Stainless Steel



www.wirebond.com

MASONPRO, Inc.
43300 Seven Mile Road
Northville, MI 48167
1-800-659-4731
www.masonpro.com