


# PRODUCT SUBMITTAL



## # 1001 Type II Anchor

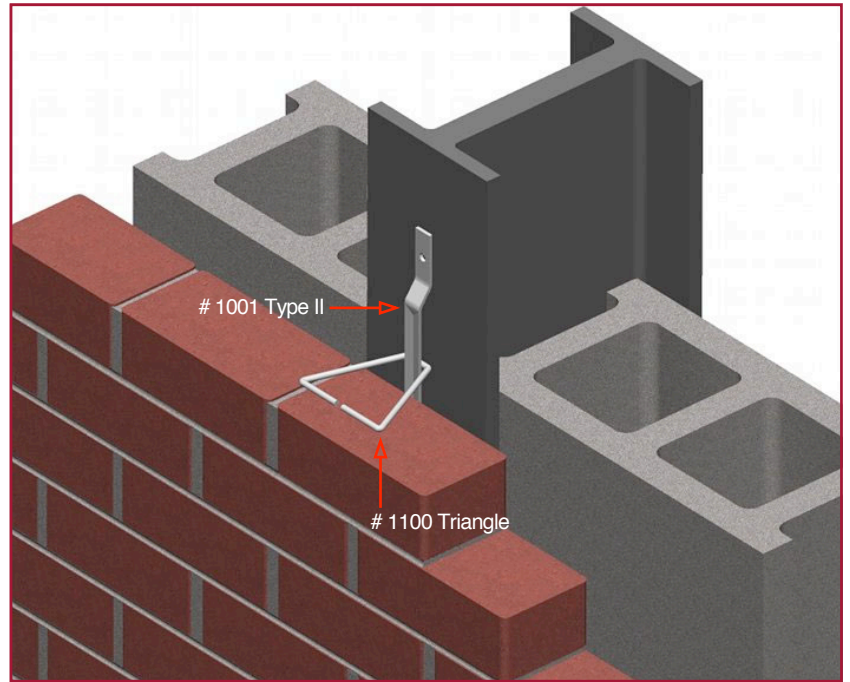

### MATERIAL CONFORMANCE

#### SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating  
**ASTM A153 / A153M-B2 (1.50 oz per sq ft)**

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

**ASTM A82 / A82M** - (Cold drawn steel wire)

Tensile Strength - 80,000 psi

Yield Point - 70,000 psi

**ACI / ASCE 530** - (Building code requirements for masonry structures)

#### Recycled Content:

Mill Galvanized & Hot Dip,  
82.8% Post-Consumer  
17% Post Industrial / Pre -  
Consumer

Stainless Steel,  
60% Post Consumer  
V O C Content - 0%

### SIZES / FINISHES

**# 1001 Type II Anchor:** 12 gauge thick" x 3/4" wide

9" length

**# 1100 Triangle:**

3/16"Ø

3"x3"    4"x4"    5"x5"    6"x6"    7"x9"    9" x 9"

#### FINISH:

- Mill Galvanized  
 Hot Dip Galvanized  
 Stainless Steel



[www.wirebond.com](http://www.wirebond.com)

MASONPRO, Inc.  
43300 Seven Mile Road  
Northville, MI 48167  
1-800-659-4731  
[www.masonpro.com](http://www.masonpro.com)