


# PRODUCT SUBMITTAL

**WIRE-BOND**

## # 1004X Type III X Screw On Veneer Anchor

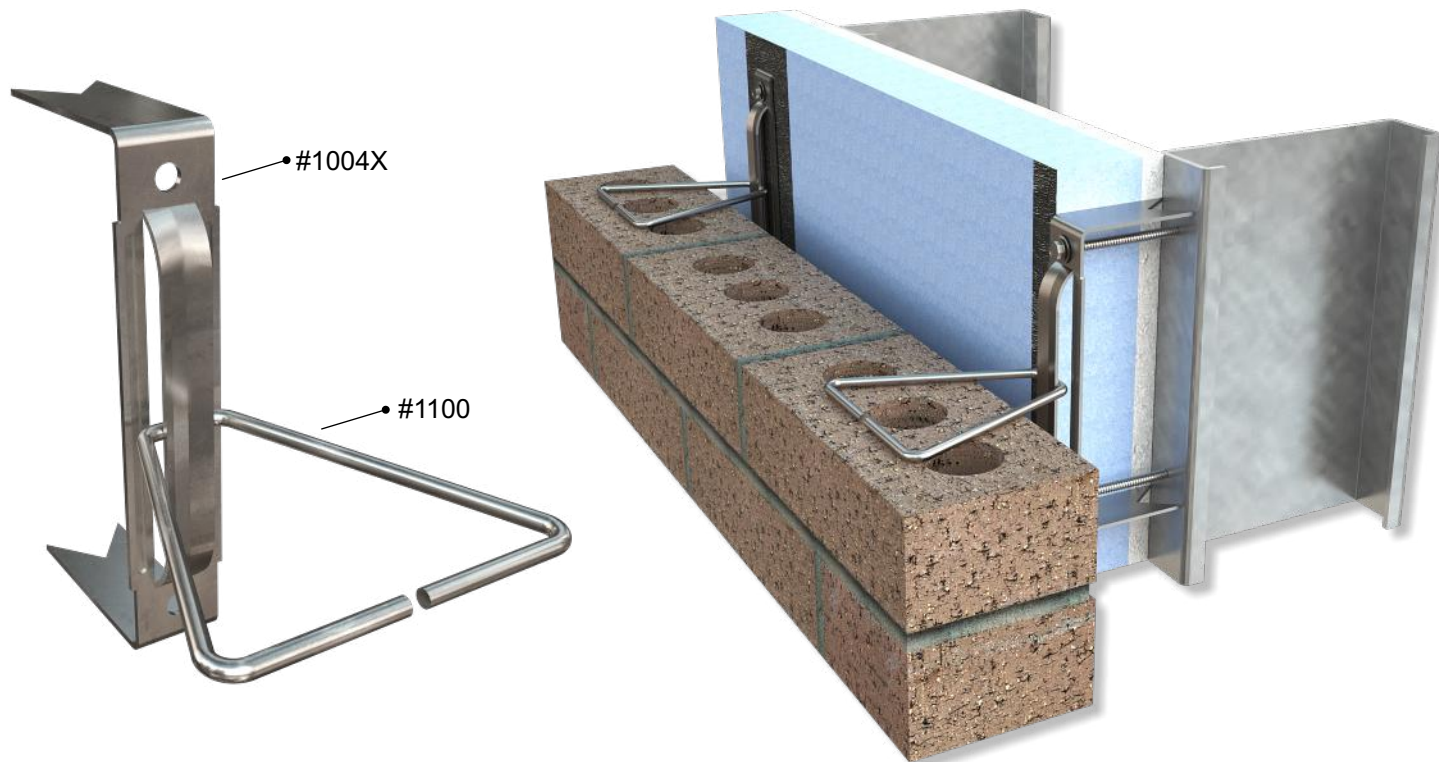

| MATERIAL CONFORMANCE   | SIZES / FINISHES   |
|--|--|
| <p><b>ASTM A1064/A1064M, ASTM A82 / A82M</b> - (Cold drawn steel wire)<br/>Tensile Strength - 80,000 psi<br/>Yield Point - 70,000 psi</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p> <p><b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b></p> <p>Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 oz per sq ft)</b></p> <p>Hot Dip Galvanized after fabrication / Zinc Coating<br/><b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)</p> <p><b>Recycled Content:</b><br/>Mill Galvanized &amp; Hot Dipped,<br/>82.8% Post-Consumer<br/>17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel,<br/>60% Post Consumer<br/>V O C Content - 0%</p> | <p><b>#1004X : 1-1/4" wide x 6" long</b></p> <p>14 gauge                      12 gauge</p> <p>(Prong length to accommodate insulation)</p> <p><b>For Gypsum sheathing:</b>        5/8"                      1/2"</p> <p><b>Insulation:</b>            1"      1 1/2"      2"      2 1/2"</p> <p>                                  3"      3 1/2"      4"</p> <p><b>#1100 Triangle:</b>            3/16" dia.</p> <p><b>Length:</b>                    3"      4"      5"      7"      9"</p> <p><b>Finish:</b>                    Mill Galvanized            Hot Dipped            Stainless Steel</p> |
|  |  |

**WIRE-BOND**

MASONPRO, Inc.  
43300 Seven Mile Road  
Northville, MI 48167  
1-800-659-4731  
www.masonpro.com