



# PRODUCT SUBMITTAL

WIRE-BOND

## #1000 Type I Weld-On Anchor

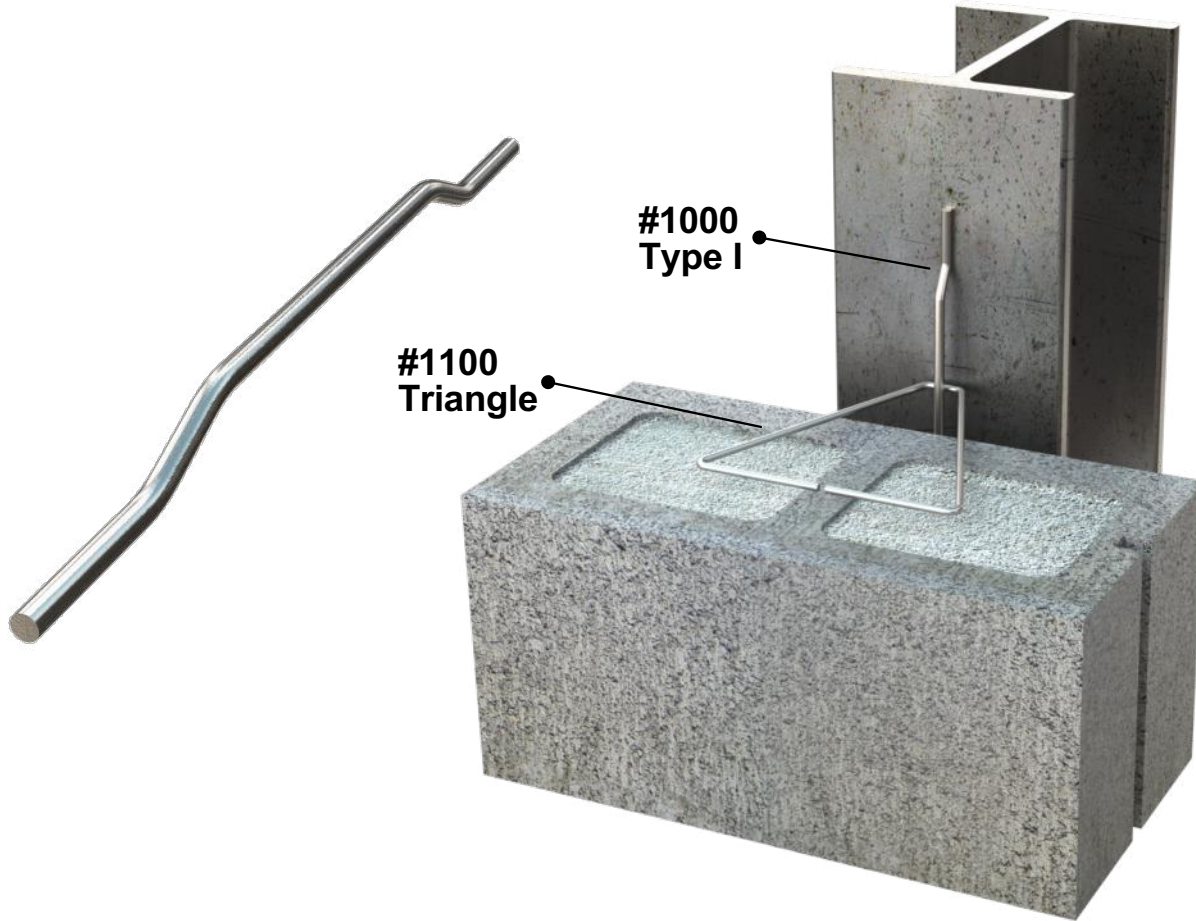

MATERIAL CONFORMANCE	SIZES / FINISHES		
<p>Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to <b>ASTM A1064/A1064M, ASTM A82/ A82M</b></p> <p>Tensile Strength - 80,000 p.s.i.   Yield Point - 70,000 p.s.i. minimum</p> <p><b>ASTM A951/A951M</b> (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p><b>ACI / ASCE 530</b> (Building Code Requirements for Masonry Structures)</p> <p>Hot-Dip Galvanized after fabrication: <b>ASTM A153/A153M-B2 (1.5 oz/ft)</b></p> <p>Wire (Stainless Steel): <b>ASTM A580/ASTM 580M - AISI</b> Type 304 (Type 316 available on special orders)</p>	<p><b>#1000 Type I Weld-On:</b></p> <p>1/4" dia. x 5"                      1/4" dia. x 9"</p>		
<p><b>Recycled Content:</b> Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre Consumer</p> <p><b>Stainless Steel</b> 97% Pre-Consumer V O C Content - 0%</p>	<p><b># 1100 Triangle:</b></p> <p>3/16" diameter standard</p> <p>3" x 3"            4" x 4"            5" x 5"</p> <p>6" x 6"            7" x 9"            9" x 9"</p>		
	<p><b>Finishes:</b></p> <p>Mill Galvanized                      Hot Dip Galvanized                      Stainless Steel</p>		

WIRE-BOND

MASONPRO, Inc.  
43300 Seven Mile Road  
Northville, MI 48167  
1-800-659-4731  
www.masonpro.com